



MINISTRY OF COMMUNICATIONS, WORKS & LABOUR

P O BOX 344, BRADES, MONTSERRAT, W I

◆ Tel: (664) 491-2521/2522 ◆ Fax: (664) 491-6659 ◆ E-mail: mcw@gov.ms

December 10th, 2015

Dear Sir/Madam,

**Re: Tender for Construction of Reinforced Concrete Road and drainage to PWD Workshop
(Section 2)**


Please see the revised Bill of Quantities attached. The quantity for Bill items 4.01 and 4.02 have been changed from 0.00 to 40.0. Please be guided accordingly.

Best Regards

B Williams

for Beverly Mendes
The Chairperson
Departmental Tender Committee
Ministry of Communications, Works & Labour

BEM/gf

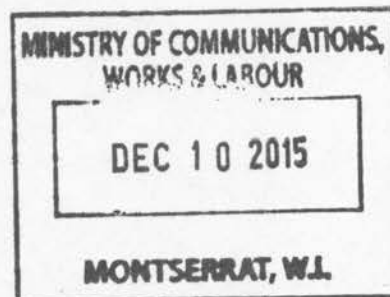

Tender for Construction of Reinforced Concrete Road to PWD Workshop - Section 2: Chainage 65-105

Item	Description	Units	Quantity	Rate	Total
1.00	Preliminaries				
1.01	Include for contractor's mobilisation and employees' insurance. Contractor shall be responsible for ensuring work safety and barricading the protection of the works during construction. Sheet No.01 presents a location of the general area for the proposed works. Sheet No.02 presents the road plan which includes the chainage and driveways.	item			
2.00	Health and Safety				
2.01	In accordance with the labour regulations the works shall be carried out in a manner that is safe to all employees on site and to the general public. Hence employees shall be attired with high visibility vest, hard hats and enclosed footwear. Provision shall also be made for employees to wear safety goggles where necessary.	item			
3.00	Reinforced Concrete Road Works				
3.01	Supply and place 200mm (6") to 250mm (8") thick in-situ concrete to comply with 3000 psi @ 28-days for construction of reinforced concrete slab. Contractor shall be responsible for poker vibrating freshly placed in-situ concrete in accordance with Sheet No.02. Include for driveways as shown on Sheet No.02. Concrete shall be broom finish on the surface and smooth edged finish in accordance with the specifications.	m ²	300.00		
3.02	Provide labour to cut and place No.66 brc fabric into form prior to placing concrete in accordance with Sheet No.02. include for brc tension laps at minimum 305mm.	m ²	300.00		
3.03	Supply and place 1"x6" formwork with the necessary shoring; also include for supplying and placing 1"x4' timber expansion joint at every five metres interval.	item			
3.04	Supply and place damp proof membrane to cover concrete for a minimum of three days immediately 24-hrs after in-situ concrete is placed.	item			
4.00	Reinforced Concrete Drainage Works				
4.01	Supply labour to assist in the clearing of the trench to get the final excavation level for the reinforced concrete kerb and slipper drain with dimensions detailed on drawing Sheet No.03.	m	40.00		
4.02	Construct reinforced concrete kerb and slipper drain in compliance with drawing details on Sheet No.03. Include for the necessary formwork and shoring to slipper drain and also for backfilling upon completion of drainage works.	m	40.00		
4.03	Supply labour to assist in the clearing of the trench to get the final excavation level for the concrete u-drain with external dimension 2'-6" wide x 2'-6" deep to comply with drawing details on Sheet No.03 after PWD has completed majority of the excavation.	m	15.0		
4.04	Construct reinforced concrete u-drain in compliance with structural drawing details on Sheet No.03. Include for the necessary formwork and shoring for the concrete u-drain and also for backfilling upon completion of u-drain.	m	30.0		
5.00	Concrete Testing				
5.01	Provision for material testing.	P.Sum			\$1,400.00
Total to form of Tender					